

GROS

CBD15-170J

Electric Walkie Pallet Truck

Advantages

Configuration and Performance



- ⊖ The truck has compact structure and is economic.
- ⊖ Permanent magnet drive motor assembled on the truck has simple structure and is easy for maintenance.
- ⊖ Stepless speed regulating is easy for operation and maintenance.
- ⊖ Open type layout of battery is easy for replacement.
- ⊖ Built-in charger is standard configuration.
- ⊖ Maintenance-free battery is safe and non-pollution.
- ⊖ The truck is compact and suitable for narrow space operation.
- ⊖ Special design for Fork in and out of double-faced pallet.
- ⊖ Lifting automatic limit is safe and energy saving.
- ⊖ Emergency reversing device and emergency brake switch are standard configuration.
- ⊖ The truck has low noise and small energy consumption and only 2 kw/h energy is consumed daily.



GROS CBD15-170J

Identification			
1.1	Manufacturer		HELI
1.2	Model		CBD15-170J
1.3	Drive		Electrics
1.4	Operator type		Walkie
1.5	Load capacity/rated load	Qt	1.5
1.6	Load centre distance	c mm	600
1.8	Load distance	x mm	870(1150) / 920(1200)
1.9	Wheelbase	y mm	1235/1285
Weights			
2.1	Net weight incl. battery		210
Wheels / chassis			
3.1	Tyres		PU
3.2	Tyre size, driving wheels	mm	210x70
3.3	Tyre size, loading wheels	mm	84x70
3.4	Additional wheels (dimensions)	mm	80x17
3.5	Wheels, number front/rear (x = driven wheels)		1 x/4
3.6	Track width, front	b10 mm	344
3.7	Track width, rear	b11	390/525
Basic dimensions			
4.4	Lift	h3 mm	120
4.9	Height of tiller in drive position min. / max.	h14 mm	850/1300
4.15	Lowered height	h13 mm	85
4.19	Overall length	l1 mm	1648/1698
4.20	Length incl. back of forks	l2 mm	498
4.21	Total width	b1/b2 mm	570/685
4.22	Fork dimensions	s/e/l mm	73/160/1150(1200)
4.25	Width over forks	b5 mm	550/685
4.32	Floor clearance centre wheelbase	m2 mm	30
4.33	Aisle width for pallets 1000 x 1200 sideways	Ast mm	1764/1814
4.34	Aisle width for pallets 800 x 1200 lengthways	Ast mm	1728/1778
4.35	Turning radius	Wa mm	1414/1464
Performance data			
5.1	Travel speed, w. / w.o. load	km/h	3.5/4
5.2	Lift speed, w. / w.o. load	mm/s	20/25
5.3	Lower speed, w. / w.o. load	mm/s	40/30
5.8	Max. gradeability, laden/unladen	%	5/7
5.10	Service brake		Electromagnetic/regenerative
Electrics			
6.1	Drive motor, output S2 60 min.	kW	0.65
6.2	Lift motor, output at S3 15%	kW	0.8
6.4	Battery voltage/nominal capacity K5	V/Ah	24 / 75
6.5	Battery weight	kg	50
Misc.			
8.1	Type of drive control		DC
8.4	Sound pressure level at operator's ear according to EN 12053	dB(A)	70

* Details of specifications and equipment are based on information available at time of printing and may change without notice.

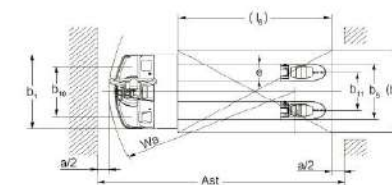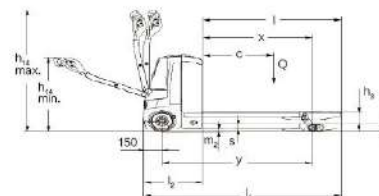

MANUFACTURER: ANHUI HELI CO., LTD.

AUTHORIZED DEALER